


EE Cores

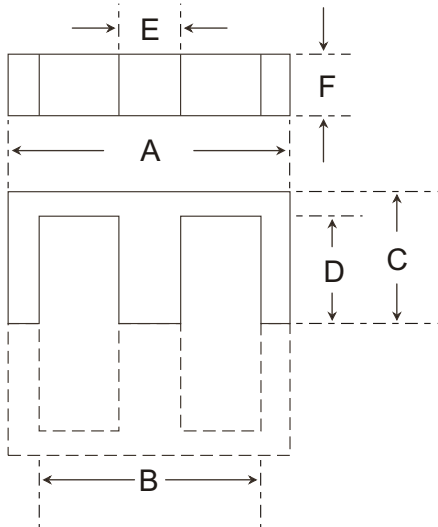

PART NO.	DIMENSIONS (mm)						EFFECTIVE PARAMETERS			Aw (mm ²)	WEIGHT (gm/pair)	A _L +30% -20%			
	A	B	C	D	E	F	Le(mm)	Ae(mm ²)	Ve(mm ³)			KM2	KM22	KM3	KM5
EE80-20	80.9 _{-1.8}	59.4 ^{+1.8}	37.7 ^{+0.66}	28.2 ^{+0.66}	20.1 _{-0.6}	20.1 _{-0.6}	185	387	71698	1108	350	5070	5070		
EE65-27	65.5 _{-2.7}	44.2 ^{+1.8}	32.5 ^{+0.3} _{-0.3}	22.2 ^{+0.7}	20.0 _{-0.7}	27.4 _{-0.8}	147	532	78200	537	400	7500	7800		
EE65-13	66.5 _{-2.7}	44.2 ^{+1.8}	32.5 ^{+0.3} _{-0.3}	22.2 ^{+0.7}	20.0 _{-0.7}	13.7 _{-0.6}	147	266	39100	537	186	3750	3900	5400	
EE55-25	55.0 ^{+1.2} _{-0.9}	37.5 ^{+1.2}	27.8 _{-0.6}	18.5 ^{+0.8}	17.2 _{-0.5}	25.0 _{-0.6}	120	422	50640	360	252	7250	7950	9900	
EE55-21	55.0 ^{+1.2} _{-0.9}	37.5 ^{+1.2}	27.8 _{-0.6}	18.5 ^{+0.8}	17.2 _{-0.5}	21.0 _{-0.6}	120	354	42500	375	219	6000	6200	8700	
EE42-20	42.0 ^{+1.0} _{-0.7}	29.5 ^{+1.2}	21.2 _{-0.4}	14.8 ^{+0.7}	12.2 _{-0.5}	20.0 _{-0.8}	97	240	23300	256	114	5000	5400	7500	
EE42-15	42.0 ^{+1.0} _{-0.7}	29.5 ^{+1.2}	21.2 _{-0.4}	14.8 ^{+0.7}	12.2 _{-0.5}	15.2 _{-0.5}	97	181	17600	256	85	3900	4000	5500	
EE40-12	41.0 ^{+0.7} _{-0.5}	28.5 ^{+0.7}	17.4 ^{+0.5}	10.25 ^{+0.25}	12.0 _{-0.7}	12.0 _{-0.7}	79	153	12100	170	60		4000		
EE35-12	35.0 ^{+0.8} _{-0.5}	25.0 ^{+0.8}	14.6 ^{+0.55} _{-0.55}	9.0 ^{+0.3}	10.3 _{-0.6}	12.0 _{-0.6}	67.3	120	8090	128	41	3400	3500		
EE32-13	31.9 ^{+1.0} _{-1.0}	22.7 ^{+0.77} _{-0.77}	14.0 ^{+0.4} _{-0.4}	9.65 ^{+0.25} _{-0.25}	8.9 ^{+0.25} _{-0.25}	12.7 ^{+0.3} _{-0.3}	67	112	7500	134	39	3300	3450		
EE30-07	30.0 ^{+0.8} _{-0.6}	19.5 ^{+0.8}	15.2 _{-0.4}	9.7 ^{+0.6}	7.2 _{-0.5}	7.3 _{-0.5}	67	60	4000	119	22	1800	1850		
EE28-11	28.2 ^{+0.4} _{-0.4}	19.2 ^{+0.4} _{-0.4}	10.6 ^{+0.3} _{-0.3}	6.6 ^{+0.2} _{-0.2}	7.5 _{-0.8}	11.0 _{-0.6}	50.7	84.6	4290	69	23.5	3450	3750	4950	6800
EE25-07	25.3 ^{+0.5} _{-0.3}	19.3 ^{+0.4} _{-0.2}	15.9 ^{+0.2} _{-0.2}	12.7 ^{+0.3} _{-0.3}	6.5 ^{+0.3} _{-0.3}	7.0 _{-0.5}	73.5	42	3087	162	16		1230	1700	2350
EE25-06	25.4 ^{+0.7} _{-0.7}	19.6 ^{+0.6} _{-0.6}	9.5 ^{+0.2} _{-0.2}	6.5 ^{+0.2} _{-0.2}	6.3 ^{+0.25} _{-0.25}	6.3 ^{+0.25} _{-0.25}	48	40	1950	86	10		1600	2200	3050
EE22-06	22.0 ^{+0.4} _{-0.4}	17.1 ^{+0.8}	11.22 ^{+0.1} _{-0.1}	7.7 ^{+0.2} _{-0.2}	4.3 ^{+0.2} _{-0.2}	5.75 ^{+0.25} _{-0.25}	52	32	1664	98	9		1250		2500
EE20-05	20.0 ^{+0.7} _{-0.4}	12.8 ^{+0.7} _{-0.4}	10.2 _{-0.4}	6.3 ^{+0.5}	5.2 _{-0.4}	5.3 _{-0.4}	43	31	1340	47	7.5	1250	1300		2600
EE19-05	19.3 ^{+0.3} _{-0.3}	14.0 ^{+0.3} _{-0.3}	7.9 ^{+0.2} _{-0.2}	5.5 _{-0.2}	5.2 _{-0.5}	5.2 _{-0.5}	38	25	950	48	4.7	1150	1200		2050
EE19-05S	19.0 ^{+0.3} _{-0.3}	14.5 ^{+0.3} _{-0.3}	7.9 ^{+0.2} _{-0.2}	5.6 ^{+0.15} _{-0.15}	4.7 _{-0.5}	5.2 _{-0.4}	39.3	22.7	891	55	4.5	1000	1050		2000
EE13-06	12.65 ^{+0.45} _{-0.45}	9.2 ^{+0.3} _{-0.3}	6.5 _{-0.2}	4.5 ^{+0.3}	3.7 _{-0.3}	6.3 _{-0.3}	29.6	22.4	663	24	3.3	1250	1450	2050	2250
EE10-11	10.2 ^{+0.3} _{-0.3}	7.8 ^{+0.3} _{-0.3}	5.55 ^{+0.15} _{-0.15}	4.15 ^{+0.15}	2.4 ^{+0.2} _{-0.2}	5.0 _{-0.3}	25.4	12.0	305	20	1.9		850	1250	1400