


EER and EC CORES

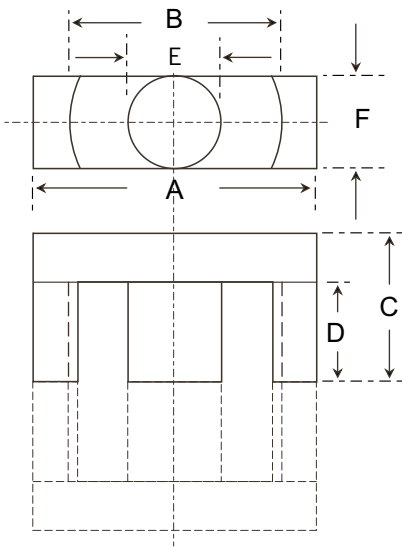

PART NO.	DIMENSIONS (mm)						EFFECTIVE PARAMETER			Aw (mm ²)	WEIGHT (gm/pair)	A _L ^{+30%} _{-20%}		
	A	B	C	D	E	F	Le(mm)	Ae(mm ²)	Ve(mm ³)			KM2	KM22	KM3
EER42-17	42.15 ^{+0.65} _{-0.65}	30.3 ^{+0.5} _{-0.5}	25.0 ^{+0.15} _{-0.15}	17.5 ^{+0.15} _{-0.15}	17.3 ^{+0.25} _{-0.25}	17.3 ^{+0.25} _{-0.25}	107.5	240	25800	227	130	4600	4800	
EER39-13	39.0 ^{+1.4} _{-1.4}	28.6 ^{+1.0} _{-1.0}	22.2 ^{+0.2} _{-0.2}	17.0 ^{+0.25} _{-0.25}	12.8 ^{+0.2} _{-0.2}	12.8 ^{+0.2} _{-0.2}	101.6	131	13310	268	69			4000
EER39-13B	39.0 ^{+1.4} _{-1.4}	28.6 ^{+1.0} _{-1.0}	14.6 ^{+0.2} _{-0.2}	9.4 ^{+0.14} _{-0.14}	12.8 ^{+0.2} _{-0.2}	12.8 ^{+0.2} _{-0.2}	71.5	128	9152		45	3700	4000	
EER35-11	35.0 ^{+0.5} _{-0.5}	25.6 ^{+1.0} _{-1.0}	22.5 ^{+0.3} _{-0.3}	16.5 ^{+0.3} _{-0.3}	11.3 ^{+0.3} _{-0.3}	11.3 ^{+0.3} _{-0.3}	97.3	111	10800	236	55	2450		
EER35-11B	35.0 ^{+0.7} _{-0.7}	25.3 min	20.9 ^{+0.25} _{-0.25}	14.9 ^{+0.3} _{-0.3}	11.3 ^{+0.4} _{-0.4}	11.3 ^{+0.3} _{-0.3}	91	111	10101	198	55	2500	2600	3600
EER35-11D	35.0 ^{+0.5} _{-0.5}	25.6 ^{+1.0} _{-1.0}	20.7 ^{+0.3} _{-0.3}	14.7 ^{+0.3} _{-0.3}	11.3 ^{+0.3} _{-0.3}	11.3 ^{+0.3} _{-0.3}	90.1	111	10001		50		2300	
EER35-11N	35.3 ^{+0.5} _{-0.5}	26.4 min	20.7 ^{+0.3} _{-0.3}	14.7 ^{+0.3} _{-0.3}	11.3 ^{+0.3} _{-0.3}	11.3 ^{+0.3} _{-0.3}	94.6	122.3	11569		41	2650	2900	3850
EER28-11	28.5 ^{+0.6} _{-0.5}	21.2 min	16.9 ^{+0.25} _{-0.25}	12.5 ^{+0.3} _{-0.25}	9.9 ^{+0.25} _{-0.25}	11.4 ^{+0.25} _{-0.25}	75.5	83	6270	141	34	2200	2300	
EER28-11A	28.5 ^{+0.6} _{-0.5}	21.2 min	14.0 ^{+0.2} _{-0.2}	9.65 ^{+0.25} _{-0.25}	9.9 ^{+0.25} _{-0.25}	11.4 ^{+0.25} _{-0.25}	64	82.1	5257	103	27	2650	2900	3800
EC45-18	45.0 ^{+0.9} _{-0.9}	33.6 ^{+1.0} _{-1.0}	17.3 ^{+0.2} _{-0.2}	10.8 min	17.7 ^{+0.2} _{-0.2}	17.8 ^{+0.2} _{-0.2}	80	228	18240	172	96	5850	6100	
EC42-15	42.0 ^{+0.8} _{-0.8}	29.2 ^{+1.2} _{-1.2}	22.4 ^{+0.3} _{-0.3}	15.4 ^{+0.3} _{-0.3}	15.5 ^{+0.3} _{-0.3}	15.5 ^{+0.4} _{-0.4}	99.1	203	20117	199	103	4200	4350	