


EF Cores

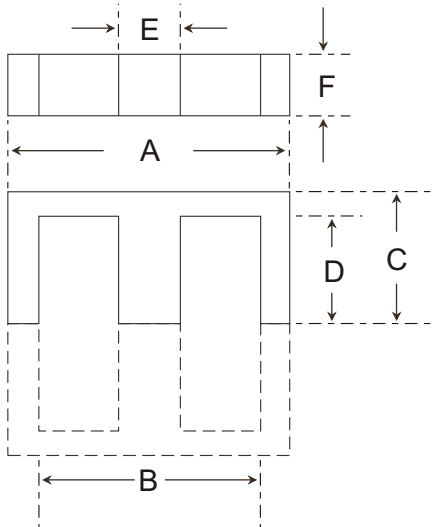

PART NO.	DIMENSIONS (mm)						EFFECTIVE PARAMETERS			Aw (mm ²)	WEIGHT (gm/pair)	A _L ^{+30%} _{-20%}			
	A	B	C	D	E	F	Le(mm)	Ae(mm ²)	Ve(mm ³)			KM2	KM22	KM3	KM5
EF25-11	25.0 ^{+0.8} _{-0.7}	17.5 ^{+0.8}	12.8 _{-0.5}	8.7 ^{+0.5}	7.5 _{-0.5}	11.0 ^{+0.3} _{-0.3}	57.5	84.7	4870	87	23	2800	2900		
EF25-07	25.0 ^{+0.8} _{-0.7}	17.5 ^{+0.8}	12.8 _{-0.5}	8.7 ^{+0.5}	7.5 _{-0.5}	7.5 _{-0.6}	57.5	52.5	3020	87	15	1700	1800		3200
EF20-08	20.4 _{-0.8}	14.1 ^{+0.8}	10.1 _{-0.4}	7.0 ^{+0.4}	5.9 _{-0.4}	8.0 ^{+0.2} _{-0.2}	44.9	47.4	2128	57	10.4	2000	2200	2850	4300
EF20-05	20.4 _{-0.8}	14.1 ^{+0.8}	10.1 _{-0.4}	7.0 ^{+0.4}	5.9 _{-0.4}	5.9 _{-0.5}	44.9	33.5	1500	57	7.4	1350	1400		2750
EF16-05	16.0 ^{+0.7} _{-0.5}	11.3 ^{+0.6}	8.2 _{-0.3}	5.7 ^{+0.4}	4.7 _{-0.3}	4.7 _{-0.4}	37.6	20.1	754	37	4	950	1000	1450	1850
EF12.6	12.65 ^{+0.45}	9.2 ^{+0.3}	6.5	4.5 ^{+0.3}	3.7	3.7	29.6	13.0	384	24	2	750	800		1300