


ETD CORES

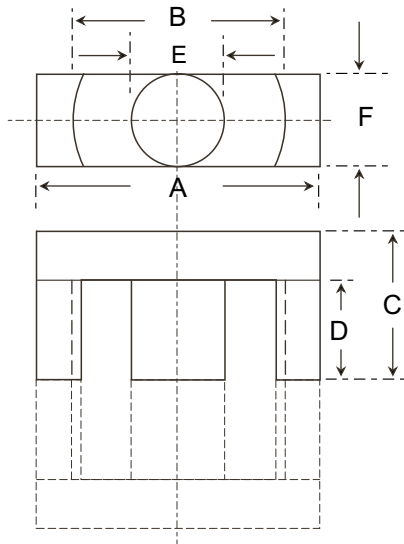

PART NO.	DIMENSIONS (mm)						EFFECTIVE PARAMETER			Aw (mm²)	WEIGHT (gm/pair)	A _L +30% - 20%		
	A	B	C	D	E	F	Le(mm)	Ae(mm²)	Ve(mm³)			KM2	KM22	KM3
ETD59-22	59.8 ^{+1.4} _{-1.4}	44.70 ^{+1.1} _{-1.1}	31.0 ^{+0.2} _{-0.2}	22.45 ^{+0.45} _{-0.45}	21.65 ^{+0.45} _{-0.45}	^{+0.45} _{-0.45}	139	368	51200	366	260	5450	5800	
ETD54-19	54.5 ^{+1.3} _{-1.3}	41.2 ^{+1.1} _{-1.1}	27.6 ^{+0.2} _{-0.2}	20.2 ^{+0.4} _{-0.4}	18.9 ^{+0.4} _{-0.4}	18.9 ^{+0.4} _{-0.4}	127	280	35500	405	192	4550	4850	
ETD49-17	48.5 ^{+1.3} _{-0.9}	36.1 ^{+1.8}	24.9 ^{+0.2} _{-0.4}	18.5 ^{+0.3} _{-0.3}	16.7 ^{+0.4} _{-0.8}	16.7 ^{+0.4} _{-0.8}	114	211	24000	350	120	3800	3950	
ETD44-15	43.8 ^{+1.2} _{-0.8}	32.5 ^{+1.6}	22.5 ^{+0.2} _{-0.4}	16.1 min	15.2 ^{+0.4} _{-0.8}	15.2 ^{+0.4} _{-0.8}	103	173	17800	278	90	3450	3600	
ETD39-13	38.9 ^{+1.1} _{-0.7}	29.3 ^{+1.6}	20.0 ^{+0.2} _{-0.4}	14.2 min	12.8 ^{+0.4} _{-0.6}	12.8 ^{+0.4} _{-0.6}	92.2	125	11500	234	60	2750	2850	
ETD39-13B	38.9 ^{+1.1} _{-0.7}	29.3 ^{+1.6}	17.8 ^{+0.2} _{-0.2}	12.6 ^{+0.4} _{-0.4}	12.8 ^{+0.4} _{-0.6}	12.8 ^{+0.4} _{-0.6}	84	125	10500	200	52	3100	3300	
ETD34-11	34.0 ^{+1.0} _{-0.6}	25.6 ^{+1.4}	17.5 ^{+0.2} _{-0.4}	11.8 min	11.1 ^{+0.4} _{-0.6}	11.1 ^{+0.4} _{-0.6}	78.6	97.1	7640	171	39	2400	2500	
ETD34-11A	34.0 ^{+1.0} _{-0.6}	25.6 ^{+1.4}	13.0 ^{+0.13} _{-0.13}	7.8 ^{+0.13} _{-0.13}	10.8 ^{+0.23} _{-0.23}	10.8 ^{+0.23} _{-0.23}	63	98	6174		30.5	3250	3450	
ETD29-10	30.6 ^{+1.0} _{-1.6}	22.0 ^{+1.4}	16.0 ^{+0.2} _{-0.4}	10.7 ^{+0.6}	9.8 ^{+0.4} _{-0.6}	9.8 ^{+0.4} _{-0.6}	71	76	5377	130	28	2150	2250	
ETD29-10D	30.6 ^{+1.0} _{-1.6}	22.0 ^{+1.4}	13.0 ^{+0.2} _{-0.2}	8.0 ^{+0.3} _{-0.3}	9.8 ^{+0.4} _{-0.6}	9.8 ^{+0.4} _{-0.6}	59	78	4602		23.5	2750	2950	