


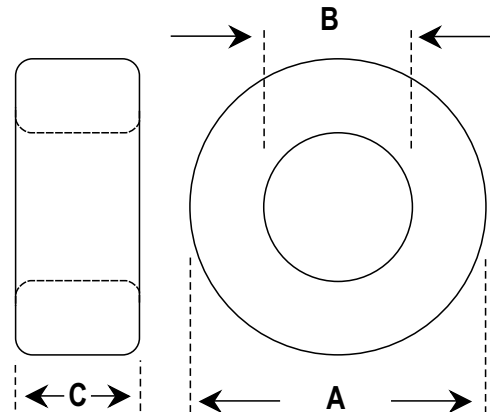

Advantages

- Closed Flux Path
- Low Magnetic Leakage
- Low Humming
- Compact Dimension
- Readily available at custom sizes
- Cost effective
- No break in magnetic path

Available material:

0.35/0.30/0.27/0.23/0.10/0.08/0.05mm.

Available process:

- annealed
- impregnated
- epoxy coated

Dimension

Min.Strip Width 3mm

Min. Inside Diameter 5mm

Strip thickness and stacking factor	
Thickness mm	Stacking factor
0.35	0.96
0.30	0.96
0.27	0.95
0.23	0.95
0.10	0.90
0.08	0.88
0.05	0.86

Tolerances (mm)				
OD (A)		ID (B)		H (C)
Diameter	Tolerance	Diameter	Tolerance	Tolerance
≤10	±0.4	≤10	±0.30	±0.3
≤25	±0.5	≤25	±0.40	±0.3
≤50	±1.0	≤50	±0.50	±0.4
≤80	±1.0	≤80	±0.75	±0.5
≤100	±1.0	≤100	±0.80	±0.5
≤160	±2.0	≤160	±1.30	±0.8
≤200	±2.5	≤200	±1.50	±1.5
≤320	±2.5	≤320	±2.00	±2.0
≤500	±3.5	≤500	±2.50	±2.5
≤800	±5.0	≤800	±3.50	±3.0
>800	±7.5	>800	±5.00	±4.0