


Part No.	AL (nH/N2)	Before Coating (mm)			After coating (mm)			Ae (cm ²)	Ie (cm)	V (cm ³)	W (cm ²)	Perm. [μ]
		OD Max.	ID Min.	HT Max.	OD Max.	ID Min.	HT Max.					
TH50-026A	12	12.70	7.62	4.75	13.46	6.99	5.51	0.114	3.12	0.356	0.383	26
TH50-060A	27	12.70	7.62	4.75	13.46	6.99	5.51	0.114	3.12	0.356	0.383	60
TH50-125A	56	12.70	7.62	4.75	13.46	6.99	5.51	0.114	3.12	0.356	0.383	125
TH65-026A	15	16.50	10.20	6.35	17.40	9.53	7.11	0.192	4.11	0.789	0.713	26
TH65-060A	35	16.50	10.20	6.35	17.40	9.53	7.11	0.192	4.11	0.789	0.713	60
TH65-125A	72	16.50	10.20	6.35	17.40	9.53	7.11	0.192	4.11	0.789	0.713	125
TH68-026A	19	17.30	9.65	6.35	18.03	9.02	7.11	0.232	4.14	0.96	0.638	26
TH68-060A	43	17.30	9.65	6.35	18.03	9.02	7.11	0.232	4.14	0.96	0.638	60
TH68-125A	89	17.30	9.65	6.35	18.03	9.02	7.11	0.232	4.14	0.96	0.638	125
TH80-026A	14	20.30	12.70	6.35	21.10	12.07	7.11	0.226	5.09	1.15	1.14	26
TH80-060A	32	20.30	12.70	6.35	21.10	12.07	7.11	0.226	5.09	1.15	1.14	60
TH80-125A	68	20.30	12.70	6.35	21.10	12.07	7.11	0.226	5.09	1.15	1.14	125
TH90-026A	19	22.90	14.70	7.62	23.62	13.39	8.38	0.331	5.67	1.88	1.41	26
TH90-060A	43	22.90	14.70	7.62	23.62	13.39	8.38	0.331	5.67	1.88	1.41	60
TH90-125A	90	22.90	14.70	7.62	23.62	13.39	8.38	0.331	5.67	1.88	1.41	125
TH90-026A-H14	35	22.90	15.00	14.00	23.62	13.39	15.00	0.608	5.67	3.454	1.41	26
TH90-060A-H14	79	22.90	15.00	14.00	23.62	13.39	15.00	0.608	5.67	3.454	1.41	60
TH90-125A-H14	165	22.90	15.00	14.00	23.62	13.39	15.00	0.608	5.67	3.454	1.41	125
TH92-026A	22	23.60	14.40	8.89	24.30	13.77	9.70	0.388	5.88	2.28	1.49	26
TH92-060A	51	23.60	14.40	8.89	24.30	13.77	9.70	0.388	5.88	2.28	1.49	60
TH92-125A	105	23.60	14.40	8.89	24.30	13.77	9.70	0.388	5.88	2.28	1.49	125
TH92-026A-H14	35	23.60	15.00	14.00	24.30	13.77	15.00	0.611	5.88	3.591	1.49	26
TH92-060A-H14	80	23.60	15.00	14.00	24.30	13.77	15.00	0.611	5.88	3.591	1.49	60
TH92-125A-H14	165	23.60	15.00	14.00	24.30	13.77	15.00	0.611	5.88	3.591	1.49	125
TH92-026A-H18	45	23.60	14.40	18.00	24.30	13.77	19.00	0.786	5.88	4.616	1.49	26
TH92-060A-H18	103	23.60	14.40	18.00	24.30	13.77	19.00	0.786	5.88	4.616	1.49	60
TH92-125A-H18	213	23.60	14.40	18.00	24.30	13.77	19.00	0.786	5.88	4.616	1.49	125
TH106-026A	32	26.90	14.70	11.20	27.70	14.10	11.99	0.654	6.35	4.15	1.56	26
TH106-060A	75	26.90	14.70	11.20	27.70	14.10	11.99	0.654	6.35	4.15	1.56	60
TH106-125A	157	26.90	14.70	11.20	27.70	14.10	11.99	0.654	6.35	4.15	1.56	125
TH106-026A-H14	40	26.90	14.70	14.00	27.70	14.10	15.00	0.818	6.35	5.194	1.56	26
TH106-060A-H14	94	26.90	14.70	14.00	27.70	14.10	15.00	0.818	6.35	5.194	1.56	60
TH106-125A-H14	196	26.90	14.70	14.00	27.70	14.10	15.00	0.818	6.35	5.194	1.56	125

Part No.	AL (nH/N2)	Before Coating (mm)			After coating (mm)			Ae (cm2)	Ie (cm)	V (cm3)	W (cm2)	Perm. [μ]
		OD Max.	ID Min.	HT Max.	OD Max.	ID Min.	HT Max.					
TH106-026A-H18	51	26.90	14.70	18.00	27.70	14.10	19.00	1.051	6.35	6.67	1.56	26
TH106-060A-H18	120	26.90	14.70	18.00	27.70	14.10	19.00	1.051	6.35	6.67	1.56	60
TH106-125A-H18	252	26.90	14.70	18.00	27.70	14.10	19.00	1.051	6.35	6.67	1.56	125
TH107-026A	22	26.90	14.70	8.64	27.70	14.10	9.45	0.497	6.352	3.155	1.56	26
TH107-060A	59	26.90	14.70	8.64	27.70	14.10	9.45	0.497	6.352	3.155	1.56	60
TH107-125A	123	26.90	14.70	8.64	27.70	14.10	9.45	0.497	6.352	3.155	1.56	125
TH130-026A	28	33.00	19.90	10.70	33.83	19.30	11.61	0.672	8.15	5.48	2.93	26
TH130-060A	61	33.00	19.90	10.70	33.83	19.30	11.61	0.672	8.15	5.48	2.93	60
TH130-125A	127	33.00	19.90	10.70	33.83	19.30	11.61	0.672	8.15	5.48	2.93	125
TH130-026A-H14	37	33.00	19.90	14.00	33.83	19.30	15.00	0.879	8.15	7.17	2.93	26
TH130-060A-H14	80	33.00	19.90	14.00	33.83	19.30	15.00	0.879	8.15	7.17	2.93	60
TH130-125A-H14	166	33.00	19.90	14.00	33.83	19.30	15.00	0.879	8.15	7.17	2.93	125
TH130-026A-H18	47	33.00	19.90	18.00	33.83	19.30	19.00	1.13	8.15	9.219	2.93	26
TH130-060A-H18	103	33.00	19.90	18.00	33.83	19.30	19.00	1.13	8.15	9.219	2.93	60
TH130-125A-H18	214	33.00	19.90	18.00	33.83	19.30	19.00	1.13	8.15	9.219	2.93	125
TH131-026A	22	33.00	19.90	8.76	33.83	19.30	9.70	0.551	8.147	4.49	2.93	26
TH131-060A	51	33.00	19.90	8.76	33.83	19.30	9.70	0.551	8.147	4.49	2.93	60
TH131-125A	109	33.00	19.90	8.76	33.83	19.30	9.70	0.551	8.147	4.49	2.93	125
TH132-026A	28	33.00	19.90	11.18	33.83	19.30	11.99	0.698	8.147	5.687	2.93	26
TH132-060A	65	33.00	19.90	11.18	33.83	19.30	11.99	0.698	8.147	5.687	2.93	60
TH132-125A	135	33.00	19.90	11.18	33.83	19.30	11.99	0.698	8.147	5.687	2.93	125
TH135-026A	16	34.30	23.40	8.89	35.10	22.56	9.83	0.454	8.95	4.06	4.01	26
TH135-060A	38	34.30	23.40	8.89	35.10	22.56	9.83	0.454	8.95	4.06	4.01	60
TH135-125A	79	34.30	23.40	8.89	35.10	22.56	9.83	0.454	8.95	4.06	4.01	125
TH141-026A	24	35.80	22.40	10.50	36.63	21.54	11.28	0.678	8.98	6.088	3.64	26
TH141-060A	56	35.80	22.40	10.50	36.63	21.54	11.28	0.678	8.98	6.088	3.64	60
TH141-125A	117	35.80	22.40	10.50	36.63	21.54	11.28	0.678	8.98	6.088	3.64	125
TH157-026A	35	39.90	24.10	14.50	40.72	23.30	15.37	1.072	9.84	10.5	4.27	26
TH157-060A	81	39.90	24.10	14.50	40.72	23.30	15.37	1.072	9.84	10.5	4.27	60
TH157-125A	168	39.90	24.10	14.50	40.72	23.30	15.37	1.072	9.84	10.5	4.27	125
TH158-026A	53	40.13	22.08	17.00	40.94	21.27	17.89	1.537	9.51	15.04	3.551	26
TH158-060A	122	40.13	22.08	17.00	40.94	21.27	17.89	1.537	9.51	15.04	3.551	60
TH158-125A	254	40.13	22.08	17.00	40.94	21.27	17.89	1.537	9.51	15.04	3.551	125
TH168-026A	47	42.90	24.20	16.26	44.00	23.30	17.16	1.475	10.22	15.74	3.644	26
TH168-040A	72	42.90	24.20	16.26	44.00	23.30	17.16	1.475	10.22	15.74	3.644	40
TH168-060A	108	42.90	24.20	16.26	44.00	23.30	17.16	1.475	10.22	15.74	3.644	60
TH168-125A	224	42.90	24.20	16.26	44.00	23.30	17.16	1.475	10.22	15.74	3.644	125


Part No.	AL (nH/N2)	Before Coating (mm)			After coating (mm)			Ae (cm2)	Ie (cm)	V (cm3)	W (cm2)	Perm. [μ]
		OD Max.	ID Min.	HT Max.	OD Max.	ID Min.	HT Max.					
TH184-026A	59	46.70	24.10	18.00	47.63	23.32	18.92	1.99	10.74	21.3	4.27	26
TH184-060A	135	46.70	24.10	18.00	47.63	23.32	18.92	1.99	10.74	21.3	4.27	60
TH184-125A	281	46.70	24.10	18.00	47.63	23.32	18.92	1.99	10.74	21.3	4.27	125
TH185-026A	37	46.70	28.70	15.20	47.63	27.89	16.13	1.34	11.63	15.53	6.11	26
TH185-060A	86	46.70	28.70	15.20	47.63	27.89	16.13	1.34	11.63	15.53	6.11	60
TH185-125A	178	46.70	28.70	15.20	47.63	27.89	16.13	1.34	11.63	15.53	6.11	125
TH200-026A	32	50.80	31.80	13.50	51.69	30.94	14.35	1.251	12.73	15.93	7.5	26
TH200-060A	73	50.80	31.80	13.50	51.69	30.94	14.35	1.251	12.73	15.93	7.5	60
TH200-125A	152	50.80	31.80	13.50	51.69	30.94	14.35	1.251	12.73	15.93	7.5	125
TH225-026A	33	57.20	35.60	14.00	58.00	34.70	14.86	1.444	14.3	20.65	9.48	26
TH225-060A	75	57.20	35.60	14.00	58.00	34.70	14.86	1.444	14.3	20.65	9.48	60
TH225-125A	156	57.20	35.60	14.00	58.00	34.70	14.86	1.444	14.3	20.65	9.48	125
TH226-026A	60	57.20	26.40	15.20	58.00	25.60	16.10	2.29	12.5	28.6	5.14	26
TH226-060A	138	57.20	26.40	15.20	58.00	25.60	16.10	2.29	12.5	28.6	5.14	60
TH226-125A	287	57.20	26.40	15.20	58.00	25.60	16.10	2.29	12.5	28.6	5.14	125
TH250-026A	83	62.00	32.60	25.00	63.10	31.37	26.27	3.675	14.37	52.81	7.73	26
TH250-060A	192	62.00	32.60	25.00	63.10	31.37	26.27	3.675	14.37	52.81	7.73	60
TH250-125A	400	62.00	32.60	25.00	63.10	31.37	26.27	3.675	14.37	52.81	7.73	125
TH250-026A-H18	60	62.00	32.60	18.00	63.10	31.37	19.27	2.646	14.37	38.02	7.73	26
TH250-060A-H18	138	62.00	32.60	18.00	63.10	31.37	19.27	2.646	14.37	38.02	7.73	60
TH250-125A-H18	288	62.00	32.60	18.00	63.10	31.37	19.27	2.646	14.37	38.02	7.73	125
TH250-026A-H20	66	62.00	32.60	20.00	63.10	31.37	21.27	2.94	14.37	42.25	7.73	26
TH250-060A-H20	154	62.00	32.60	20.00	63.10	31.37	21.27	2.94	14.37	42.25	7.73	60
TH250-125A-H20	320	62.00	32.60	20.00	63.10	31.37	21.27	2.94	14.37	42.25	7.73	125
TH268-026A	62	68.00	36.00	20.00	69.40	34.70	21.40	3.104	16.33	50.69	9.62	26
TH268-060A	143	68.00	36.00	20.00	69.40	34.70	21.40	3.104	16.33	50.69	9.62	60
TH268-125A	300	68.00	36.00	20.00	69.40	34.70	21.40	3.104	16.33	50.69	9.62	125
TH290-026A	89	74.10	45.30	35.00	75.20	44.07	36.27	5.04	18.38	92.64	15.25	26
TH290-060A	206	74.10	45.30	35.00	75.20	44.07	36.27	5.04	18.38	92.64	15.25	60
TH290-125A	429	74.10	45.30	35.00	75.20	44.07	36.27	5.04	18.38	92.64	15.25	125
TH300-026A	30	77.80	49.20	12.70	78.90	48.20	13.84	1.77	20	34.7	17.99	26
TH300-060A	68	77.80	49.20	12.70	78.90	48.20	13.84	1.77	20	34.7	17.99	60
TH300-125A	142	77.80	49.20	12.70	78.90	48.20	13.84	1.77	20	34.7	17.99	125
TH301-026A	37	77.80	49.20	15.90	78.90	48.20	17.02	2.27	19.95	45.3	17.99	26
TH301-060A	85	77.80	49.20	15.90	78.90	48.20	17.02	2.27	19.95	45.3	17.99	60
TH301-125A	178	77.80	49.20	15.90	78.90	48.20	17.02	2.27	19.95	45.3	17.99	125

Part No.	AL (nH/N2)	Before Coating (mm)			After coating (mm)			Ae (cm2)	Ie (cm)	V (cm3)	W (cm2)	Perm. [μ]
		OD Max.	ID Min.	HT Max.	OD Max.	ID Min.	HT Max.					
TH400-026A	48	101.60	57.15	16.51	103.12	55.75	17.78	3.523	24.27	85.5	24.413	26
TH400-060A	112	101.60	57.15	16.51	103.12	55.75	17.78	3.523	24.27	85.5	24.413	60
TH400-125A	232	101.60	57.15	16.51	103.12	55.75	17.78	3.523	24.27	85.5	24.413	125
TH401-026A	40	101.60	57.15	13.59	103.12	55.75	14.86	2.972	24.27	72.12	24.413	26
TH401-060A	92	101.60	57.15	13.59	103.12	55.75	14.86	2.972	24.27	72.12	24.413	60
TH401-125A	192	101.60	57.15	13.59	103.12	55.75	14.86	2.972	24.27	72.12	24.413	125
TH520-060A	124	132.54	78.59	20.32	133.96	77.04	21.72	5.347	32.43	173.4	46.612	60
TH521-060A	156	132.54	78.59	25.40	133.96	77.04	26.80	6.71	32.43	217.6	46.612	60


Percent Change of Permeability vs. DC Magnetizing Force

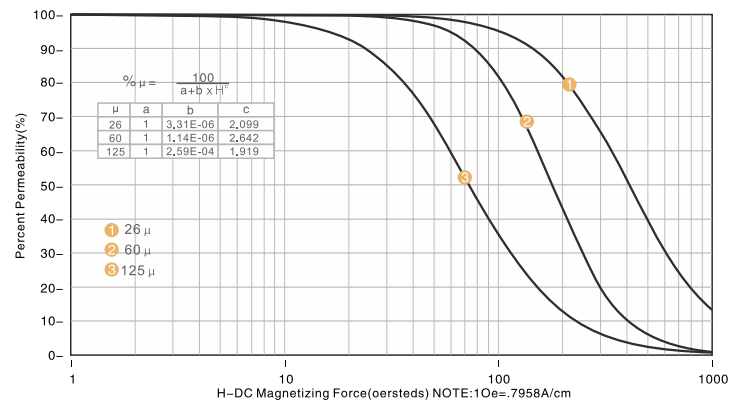


Typical Core Loss Curves(26 μ)

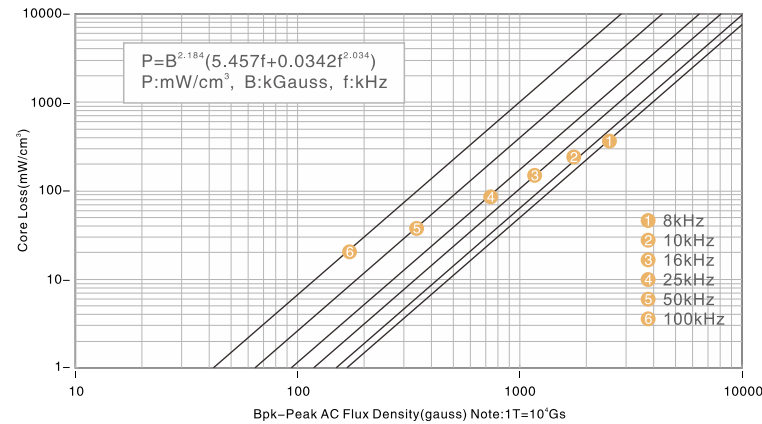


Typical Core Loss Curves(60 μ, 125 μ)

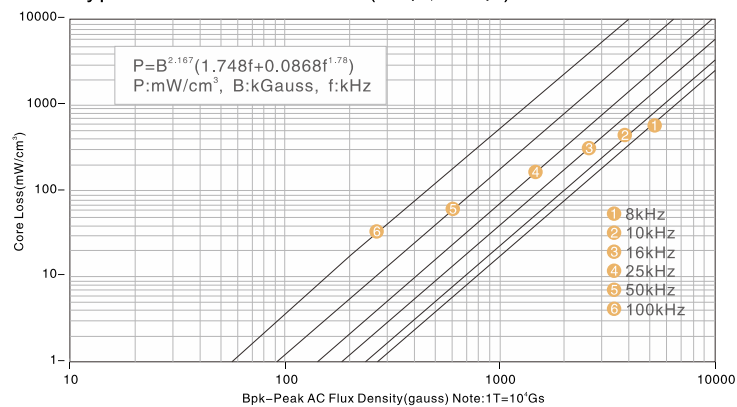

Permeability vs. Frequency

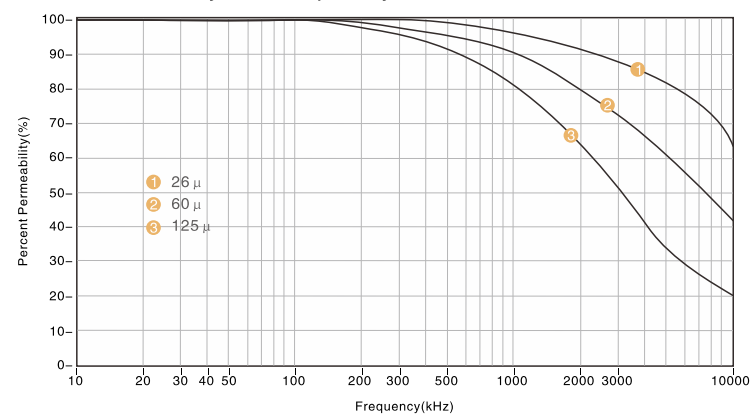

Normal Magnetization Curves

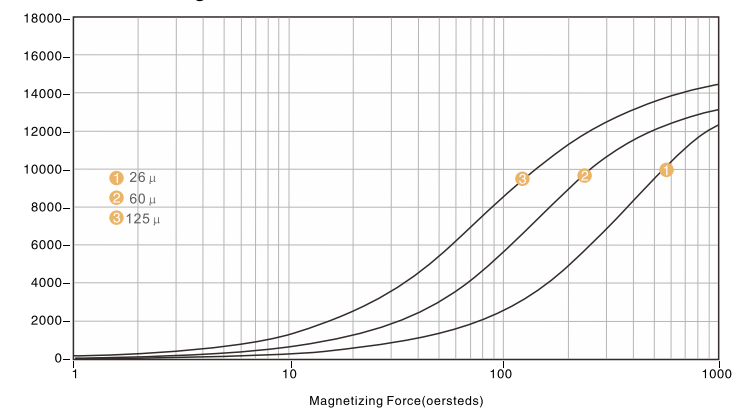

Temperature Stability

